

## PRODUCT SPECIFICATION SUPALOX OE12 (50)


PRODUCT	High Purity Alumina Slurry, Al <sub>2</sub> O <sub>3</sub>	PURITY	> 99.9%
---------	--	--------	---------

PARAMETERS	METHOD	SPECIFICATIONS
<b>TYPICAL PHYSICAL PROPERTIES</b>		
Appearance	Visual inspection	White Slurry
Al <sub>2</sub> O <sub>3</sub> Crystallinity	XRD	Alpha-Alumina
Solid PSD	D10	Laser Diffraction
	D50	Laser Diffraction
	D90	Laser Diffraction
Solid content	---	50 %
Slurry Density	---	1.6 g/cm <sup>3</sup>
pH	---	10-11.5
Shelf Life	Storage at 5-30 °C	6 Months



SUPALOX OE12 (50) is a ball-mill deagglomerated product and formulated from our High Purity Alumina powders. The composition has been developed to provide a suspension of alumina in a nontoxic base.

<b>TYPICAL CHEMICAL COMPOSITION</b>		
Na	ICP-MS	<500 ppm
Mg	ICP-MS	<10 ppm
Si	ICP-MS	<20 ppm
K	ICP-MS	<5 ppm
Ca	ICP-MS	<50 ppm
Fe	ICP-MS	<100 ppm

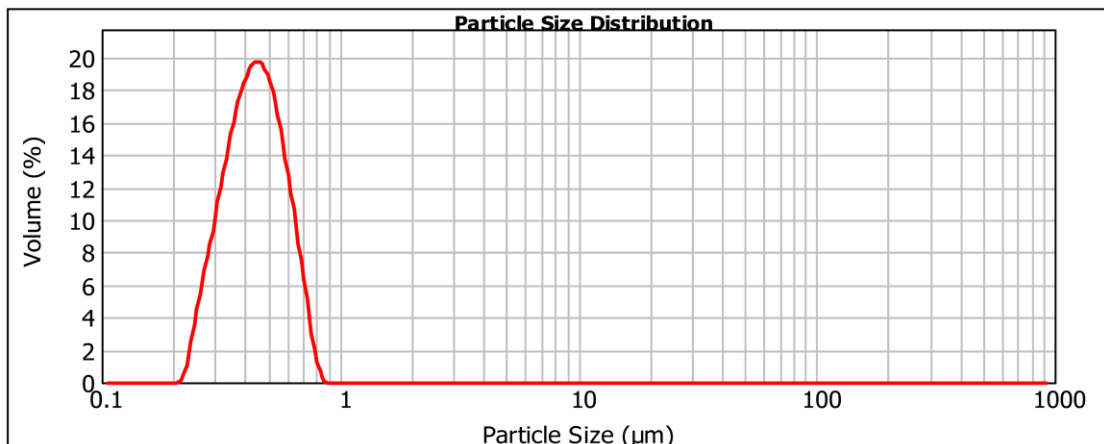

For technical information, please contact: [info@aemcanada.com](mailto:info@aemcanada.com)

Manufactured with virtually zero CO<sub>2</sub> emission in CANADA

The listed properties represent the typical measured values for this product may not represent the final properties of a given batch. Contact AEM for more information.