


PRODUCT SPECIFICATION SUPALOX P8

PRODUCT	High Purity Aluminum Oxide, Al ₂ O ₃	PURITY	> 99.95%
---------	--	--------	----------


PARAMETERS	METHOD	SPECIFICATIONS
TYPICAL PHYSICAL PROPERTIES		
Appearance	Visual inspection	White Powder
Crystallinity	XRD	Alpha-alumina
D10	Laser Diffraction	40 µm
D50	Laser Diffraction	80 µm
D90	Laser Diffraction	130 µm
Moisture	2 hrs at 120°C	<1.0 %
Surface Area	N ₂ adsorption (BET)	<10 m ² /g
Loose Bulk Density	ASTM D7481-09	1.0 g/cm ³



TYPICAL CHEMICAL COMPOSITION		
Na	ICP-MS	<160 ppm
Mg	ICP-MS	<10 ppm
Si	ICP-MS	<100 ppm
K	ICP-MS	<10 ppm
Ca	ICP-MS	<250 ppm
Fe	ICP-MS	<80 ppm

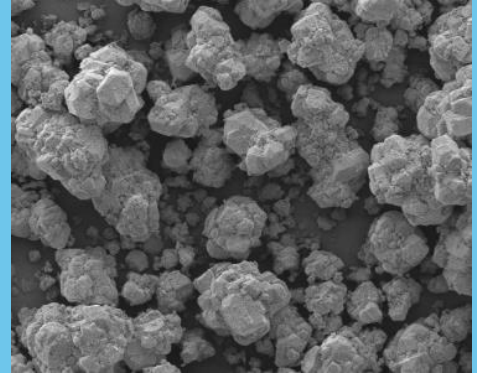

SUPALOX C3511 is a non-ground, dry, free-flowing powder designed for speciality glass and ceramics.

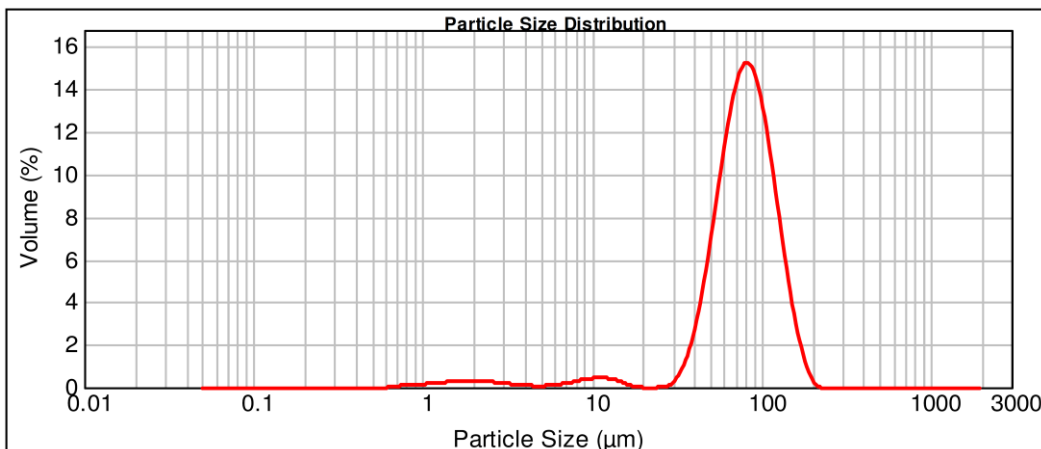

For technical information, please contact: info@aemcanada.com

Manufactured with virtually zero CO₂ emission in CANADA 

The listed properties represent the typical measured values for this product may not represent the final properties of a given batch. Contact AEM for more information.