


## PRODUCT SPECIFICATION SUPALOX C3511

PRODUCT	High Purity Aluminum Oxide, Al <sub>2</sub> O <sub>3</sub>	PURITY	> 99.95%
---------	--	--------	----------


PARAMETERS	METHOD	SPECIFICATIONS
<b>PHYSICAL PROPERTIES</b>		
Appearance	Visual inspection	White Powder
Crystallinity	XRD	Alpha-alumina
D10	Laser Diffraction	40 µm
D50	Laser Diffraction	80 µm
D90	Laser Diffraction	130 µm
Moisture	2 hrs at 120°C	<1.0 %
Surface Area	N <sub>2</sub> adsorption (BET)	<5 m <sup>2</sup> /g
Loose Bulk Density	ASTM D7481-09	1.0 g/cm <sup>3</sup>



<b>CHEMICAL COMPOSITION</b>		
Na	ICP-MS	<160 ppm
Mg	ICP-MS	<10 ppm
Si	ICP-MS	<100 ppm
K	ICP-MS	<10 ppm
Ca	ICP-MS	<250 ppm
Fe	ICP-MS	<80 ppm

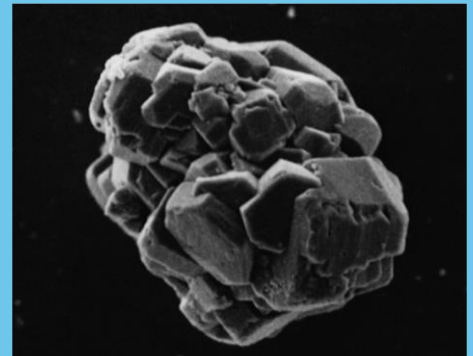

SUPALOX C3511 is a non ground, dry, free-flowing powder.  
 The powder exhibit very low levels of impurities, making it ideal for applications requiring a pure, low contamination alumina source.

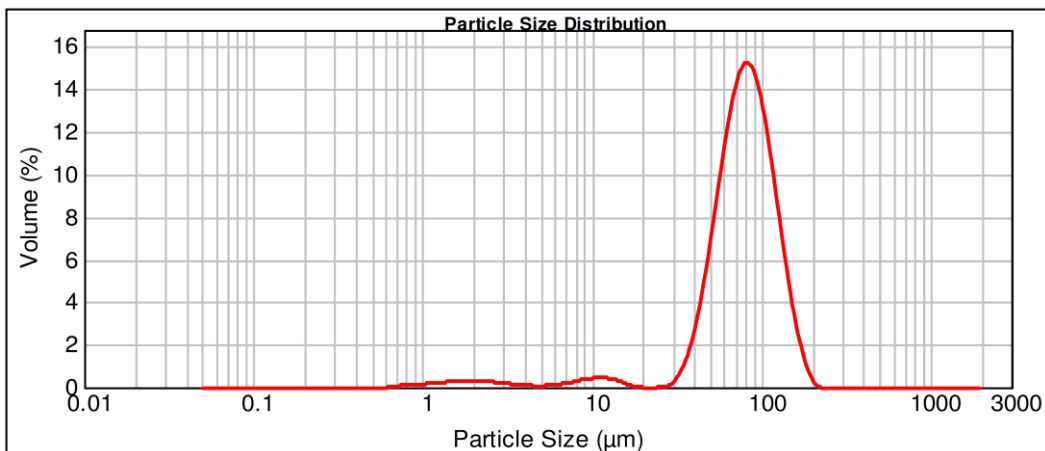

For technical information, please contact: [info@aemcanada.com](mailto:info@aemcanada.com)

Manufactured with virtually zero CO<sub>2</sub> emission in CANADA 